

TELESCOPING COLLECTION ARM



SPECIFICATIONS

Construction:	Aluminum tubes and steel components
Arm Lengths:	3 ft. (4 ft. extended), 3.5 ft. (5 ft. extended), 4.5 ft. (7 ft. extended)
Tube Diameters:	4" and 6"
Blower Pkgs (HP):	0.75, 1.5, 3.0, 5.0, 7.5
Air Flow Max (CFM):	450 to 850
Weight (lbs.):	4TS4 - 5 lbs. 4TS5 - 7 lbs. 4TS7 - 9 lbs. 6TS4 - 12 lbs. 6TS5 - 14 lbs. 6TS7 - 16 lbs.



Expanded Reach. Precision Positioning.

The Telescoping Arm extends up to 40% for maximum reach and retracts for compact positioning. Its 10-inch (on 6-inch arm) aluminum hood with full-circumference handle, 360° rotation, and 70° lift ensure precise, efficient capture from any angle. Quick, universal mounting works with walls, ducts, or existing filtration systems.






Options

- **Adjustable Air Flow Damper:** Increases operating efficiency; regulate air flow levels and blower usage based on application-specific need.
- **White Hose, Hood, and Mounting Bracket:** UL-rated hose and coordinated components work to enhance facility cleanliness and appearance in non-corrosive environments.
- **Static-Free Hose:** Reduce possible static shock of personnel and work pieces; speed maintenance, minimize particulate retention to the hose.
- **Light Kit:** Improves worker visibility.
- **Intake Guard:** Protect ducting and the blower unit from over-sized debris, such as rags and plastic sheeting that could hinder the efficient operation of the system.
- **Exhaust Blower Units:** Multiple blower units are available, from 0.75 HP up to 7.5 HP, depending on the application. Consult your representative for recommendations.

Features & Benefits

- **Telescoping Adjustment:** Add up to 40% more arm reach and collection area when arm is fully extended. Simplify storage or close-area collection when arm is retracted.
- **6-inch Diameter Inlet Hood with 360° Flange Handle:** Large, aluminum capture hood optimizes collection efficiency. Full circumference handle eases user positioning of the arm.
- **360° Collection Area:** Complete base joint rotation ensures efficient collection within a 360° area from the drop. Arm lift reaches 70° from the down position.
- **Versatile Installation:** Universal wall- or duct-mount bracket easily installs to existing filtration unit, boom arm, or ductwork.

4 Inch Telescoping Arm

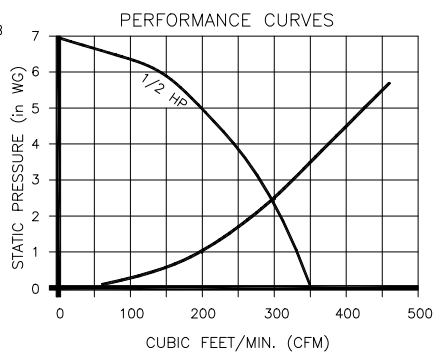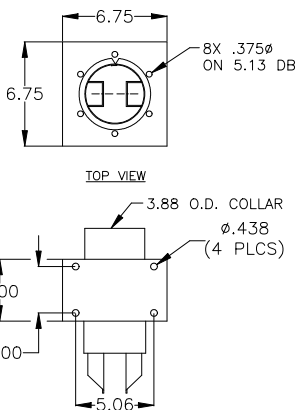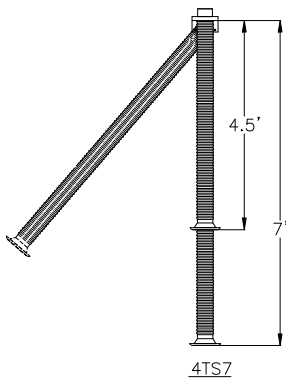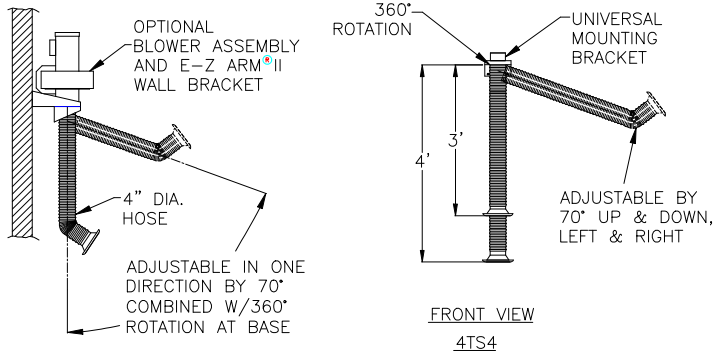

6 Inch Telescoping Arm

