

FUME BOOTH 800

PORTABLE PAINT & FUME BOOTH

Airflow
SYSTEMS INC.

SPECIFICATIONS

Construction:	16 ga. steel, powder coated cabinet
Blower Pkgs (HP):	1.5
Noise Level (dBA):	72
Electrical:	Group-D 1.5 HP - 115/208-230/1/60, 15.0/7.5 amps, std.; 208-230/460/3/60, 4.0-3.8/1.9 amps, opt.
Dimensions:	W- 35.5" H- 76" D- 33"
Air Flow Max (CFM):	800
Weight (lbs.):	250



Portable High-Efficiency Fume Control

The Airflow Systems Fume Booth 800 is a portable, self-contained filtration unit designed for flexible industrial use. Its heavy-duty steel grate supports loads up to 550 lbs, while the four-stage filtration system and direct-drive blower provide efficient, reliable contaminant control. With easy-access removable doors, Ultra-Seal® filter mounting, and explosion-proof electrical wiring, it offers both durability and safe operation.


Options

- **Pressure Gauge Kit:** Indicates when filters require cleaning.
- **95% Main Filter and Double Adsorption Modules**
- **Motor Starters/Disconnects**
- **Plastic Coated Grate**
- **Aluminum Grate**

Ultra-Seal® Filter Mounting

The Problem: Dirty air bypass with conventional "slide-in" filter mounts.

The Solution: One-piece Ultra-Seal® filter frame. Welded and sealed into the air cleaner cabinet.


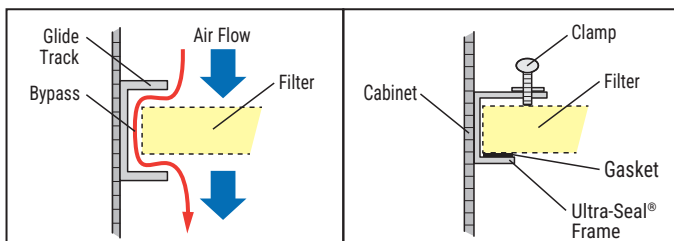


Features & Benefits

- **Portable, self-contained unit:** Easy to set up and use anywhere; includes casters for added maneuverability.
- **Heavy-duty top mounted table with 300 PSF rated steel grate:** Provides maximum loading of up to 550 lbs.
- **High efficiency 4-stage filtration:** Provides up to 95% filtration efficiency.
- **Direct-drive blower:** Higher static pressure, longer filter life and greater reliability; non-sparking; no belts or pulleys to replace.
- **Ultra-Seal® filter mounting:** Eliminates contaminant bypass of filters.
- **Removable doors:** Easy access for cleaning and filter changeout.
- **Prewired to explosion proof box:** Meets Group-D electrical requirements.

FUME BOOTH 800

PORTABLE PAINT & FUME BOOTH

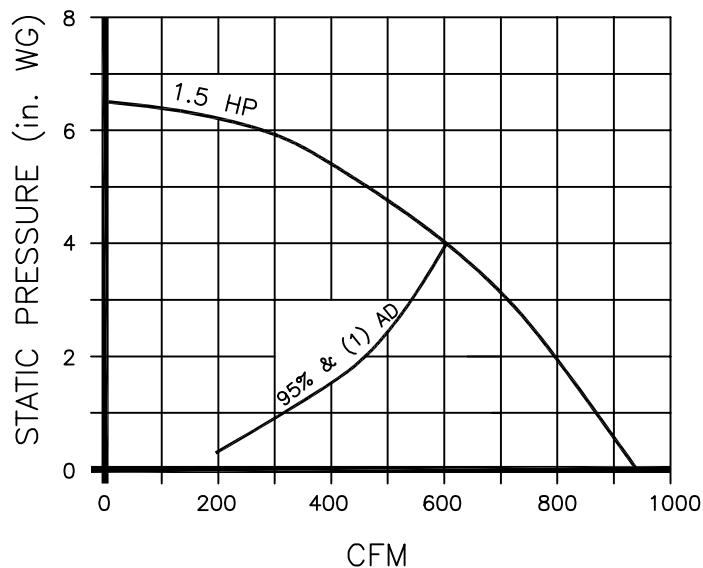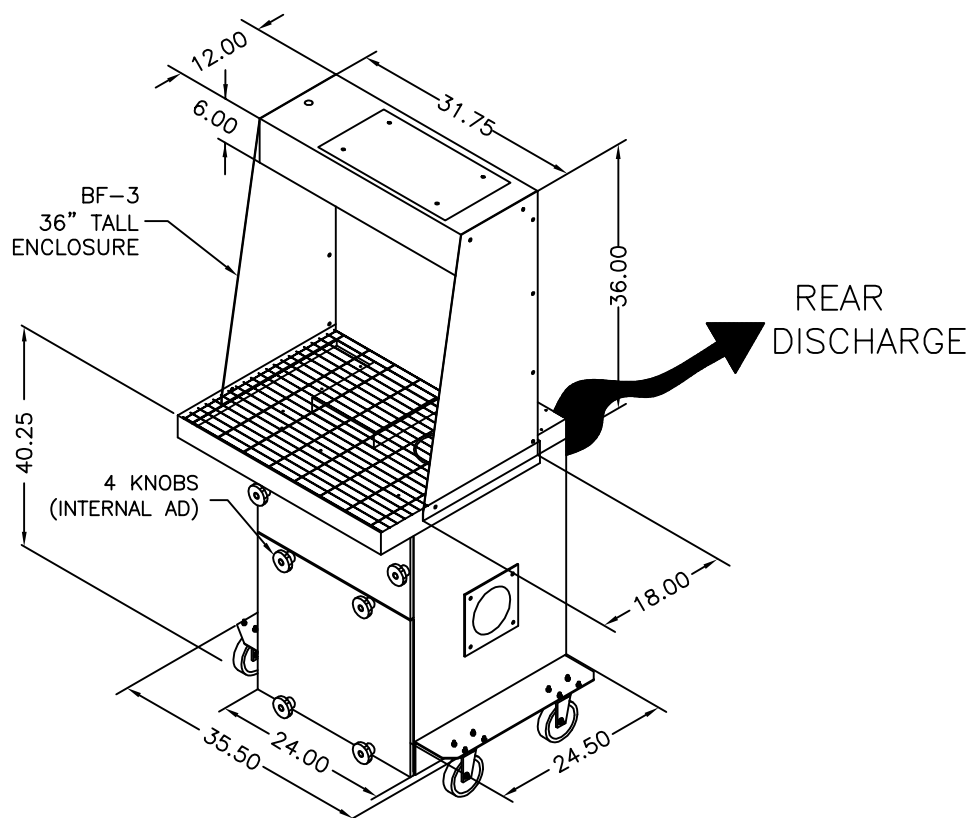

PERFORMANCE CURVES